


IMPLEMENTS OF CARNAGE II

For ease of painting it is best to assemble the buggy in three sub-sections. Then paint these sub-sections, and assemble them to complete the main buggy. 1. Buggy body; 2. Driver; 3. Top frame and gun. 4. Assembly of sub-sections. 5. Fully assembled. Also Paint the bonnet and armour separately and fit them once painted.

1

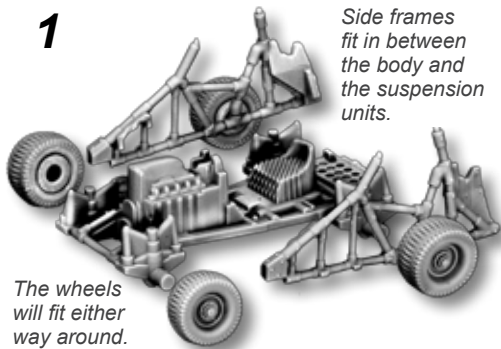

Side frames fit in between the body and the suspension units.

The wheels will fit either way around.


2

Try the driver in his seat to position his arms correctly.




3

Try the gunner in position to set his arms correctly.




4

You can remove the pistol grip from the gun if you are going to fit the gunner.

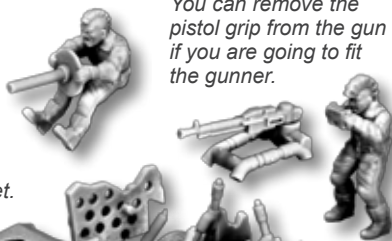


Bonnet.

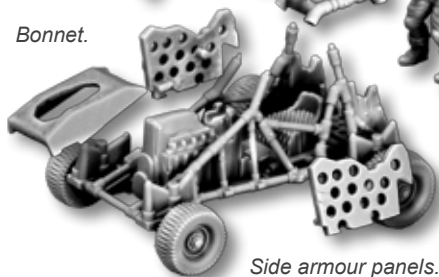

Side armour panels.


bike

The bike goes together best if you assemble the rider body and legs, then attach the front forks with his arms.

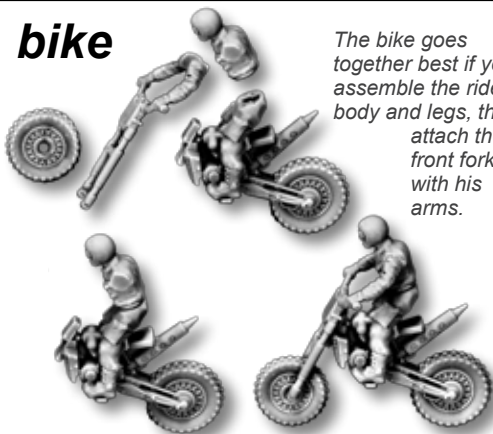

5

The buggy also looks just as good without the bonnet or side armour.

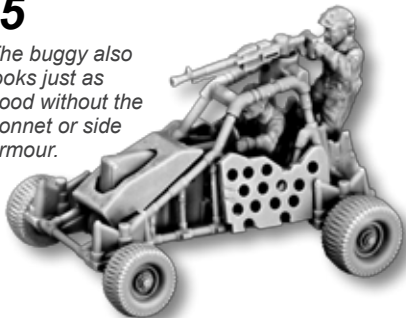

Either the grabber and wrecking-ball will fit on the swing-arm. Use them on your cars and trucks.

